

oxygenics®

IntelliShower™

Green Product

SAVES 20-70%
WATER AND ENERGY



2 SPRAYS



The easy-twist spray selection lever makes enjoying each spray quick and easy. The first spray is the patented Oxygenics core which delivers an invigorating full-body spray and the newly designed Tri-Core™ spray incorporates three Oxygenics mini cores which create a wide, robust spray. Regardless of the inbound water flow, these sprays are sure to deliver a powerful punch of showering pleasure.

SUSTAINABILITY

Oxygenics technology saves thousands of gallons of water per fixture per year in demanding commercial and residential environments. Conserving water and natural resources is one way to move towards sustainability. Using a water-conserving showerhead not only saves water, but it also saves energy.

The Smart Way To Shower

The Oxygenics IntelliShower pushes Oxygenics technology to the next level of pressurized showering by adapting to the incoming pressure. The four patented cores make up two powerful spray settings that maximize performance and efficiency. The dual sprays deliver full body coverage while saving up to 70% in water and energy consumption compared to traditional fixtures.

Pressure Boosting Technology

Increases Your Pressure - Saves Water & Energy

There is no other showerhead brand on the market that uses the patented core technology of Oxygenics showerheads and no other showerheads are able to deliver the same powerful pressurized results.

The innovative design injects air into the water stream as the accelerator fin increases the velocity of the outbound water. The result is a powerful full-body oxygenated spray that feels amazing and saves water and money at the same time.



FEATURES

Water Saving



Money Saving



2 Sprays



Wide Coverage



Lifetime Warranty



60" Hose



Easy Install



AVAILABLE FLOW RATES

2.5 GPM MAX

AVAILABLE STYLES

Fixed



Handheld



AVAILABLE FINISHES

Chrome



Brushed Nickel



White



Super charge your shower at www.oxygenics.com. Call 1.800.344.3242 or 209.529.3546.

Email sales@oxygenics.com for more.

oxygenics® IntelliShower™

FIXED

MODEL	FINISH	MAX FLOW RATE
50520	Chrome	2.5
52520	Brushed Nickel	2.5
55520	White	2.5
53520	Gold	2.5
54520	Oil Rubbed Bronze	2.5

Includes: Teflon Tape, Installation Instructions

HANDHELD

MODEL	FINISH	MAX FLOW RATE
50527	Chrome	2.5
52527	Brushed Nickel	2.5
55527	White	2.5
53527	Gold	2.5
54527	Oil Rubbed Bronze	2.5

Includes: (1) Wand, (1) 60" Hose, (1) Holder, Teflon Tape, Installation Instructions

FEATURES & BENEFITS

Self-Pressurizing Technology

Increased water velocity + air induction = MORE PRESSURE. The patented design ensures an invigorating pressurized shower spray regardless of water pressure.

Saves Water and Money

Oxygenics uses 20-70% less water compared to industry leading brands. Each showerhead can save thousands of gallons of water per year which means significant energy and money savings.

Wide Spray Coverage

Each spray setting is designed to maximize the water coverage area to make the most of each water drop. Both energizing sprays will envelop you in a drenching, powerful full-body spray.

No Clogging – Zero Maintenance

The internal components are made of Delrin® - a material similar to Teflon® which increase durability and eliminates clogging, mineral build-up and corrosion. No cleaning or maintenance required!

Limited Lifetime Warranty

The Oxygenics IntelliShower comes with a lifetime performance warranty against clogging. It's guaranteed not to clog – EVER.

The Oxygenics IntelliShower Series meets ANSI standard testing and materials specifications A112.18.1M-1996.

Designed to function appropriately at pressures no less than 20 psi. Constructed to withstand pressures of 150 psi and temperatures up to 160° F.

The internal components are constructed of injection molded Delrin acetate. The pieces are machine pressed into the base and cannot be removed with a straight pushing or pulling force of less than 100 lbs.

The cores are constructed of Delrin acetate resin. Each core spray uses a venturi system consisting of 16 air entrance ports, which allow air to increase the spray velocity. Oxygen levels in the water are increased as well.


The showerhead face and outer shell is made of plated ABS plastic enhancing the showerhead's appearance and muffling the spray functions.

The wand holder and fixed base utilizes a ball and socket allowing for adjustment. Ball is constructed with Delrin acetate. The seating washer is designed to seal around the ball swivel when compressed by assembly. On fixed models the base connector is made from free machining aluminum and CBA alloy. Bases fit any standard 1/2" male threaded shower arm.

The 60" hose and holder are constructed of ABS plastic, aluminum, and zinc. Both are designed to withstand pressures of up to 100 psi.

Lifetime warranted against clogging and defective material and workmanship.

WATER SAVINGS COMPARISON

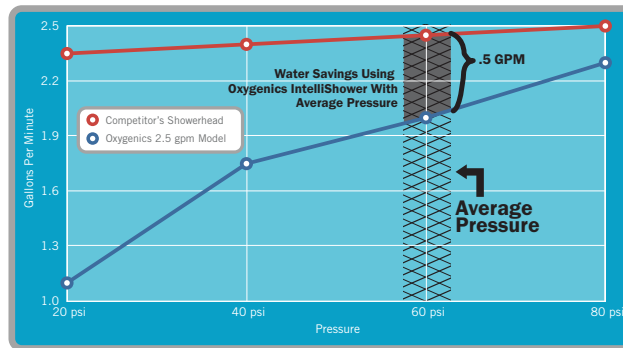

Flow restrictors have been placed in showerheads by manufacturers as a way to keep water usage at 2.5 GPM since it was mandated by the U.S. Government in 1992. This method of water restriction significantly decreases water pressure creating unsatisfactory shower performance. Oxygenics showerheads contain no removable restrictors and adapt to the incoming water pressure to use only what is necessary while still providing an extremely enjoyable and pressurized shower which saves a significant amount of water, energy and money.

While other industry-standard showerheads flow at 2.5 GPM at 60 PSI (national water pressure average), the Oxygenics IntelliShower flows at 2.0 GPM at 60 PSI, offering 20% water savings. Not only is this savings significant in reducing water, but it also reduces energy costs as less hot water is used.

As illustrated in the chart above, Oxygenics showerheads adapt to the incoming water pressure, so as the pressure decreases, more water and energy savings can be expected compared to industry-standard showerheads that have a constant flow of 2.5 GPM. In some cases, as much as 70% water and energy can be saved by using Oxygenics showerheads.

PRODUCT SPECS

Product dimensions:
 Fixed - 5.2" x 5.5" x 5.2"
 Handheld - 5.2" x 6.1" x 12.8"

Individual product weight:
 Fixed - 1 lbs.
 Handheld - 2 lbs.

PACKAGING SPECS

Package dimensions:
 Fixed - 12.5" x 7" x 4.75"
 Handheld - 12.5" x 7" x 4.75"

Case quantity (24 units):
 Fixed - 6 units / ctn.
 Handheld - 4 units / ctn.

Case weight (32 lbs. / 60 lbs.):
 Fixed - 6 lbs. (8 lbs. / ctn.)
 Handheld - 8 lbs. (10 lbs. / ctn.)

